

dimax



KIT TIMBRE INALÁMBRICO

MODELO: G123

MANUAL DE USUARIO

Basic Parameters

Product Name: Smart Doorbell Camera	
Resolution: 4MP	PIR human detection: Supports PIR detection to wake up
Day and night conversion: dual filters automatically switch	Two-Way Audio: support full duplex real-time calls
Local storage: 256G Micro SD card	Wireless Network : 2.4G 802.11 b / g / n
Supported platforms: Android / iOS	Audio input / output: -38dB microphone / speaker


Get Started:

For the best experience: We recommend you fully charge your battery before setup. Access the charging port by using the included Release Pin to remove the Mounting Plate. The LED on the front of the video doorbell will turn off when 100% charged.

Packing list: smart doorbell camera x 1, manual x 1, USB Power Cord screw accessory package x1

Product Introduction


1. Doorbell Camera

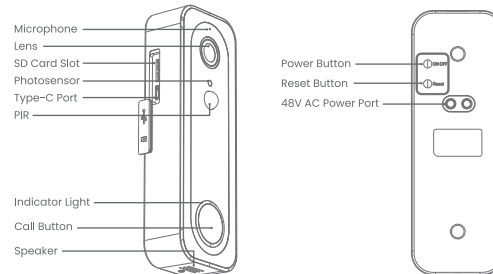

2. Doorbell Chime



What's in the box

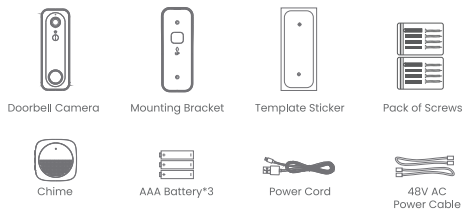

Setup

- Download the "smart life" app, create an account and then log in.
- Make sure the camera is fully charged. Press the power button for about 5 seconds until you hear the startup voice prompt. Then press the reset button for about 5 seconds until the indicator light flashes red and blue alternately.
- Open the "smart life" app, tap the "+" or "Add device" button, find the H6 camera in the list, then follow the in-app instructions.



Indicator lights status

Light Status	Camera Status
Solid red light	Camera powered-on
Flashing red and blue light	Camera ready for connection
Flashing blue light	Wi-Fi connection in progress
Solid blue light	Camera working properly
Flashing red light	Reset / firmware upgrade in progress

Connect to the chime


- ① Make sure the chime is loaded with usable batteries.
- ② Press the configuration button of the chime. The indicator light will flash and you will hear a tone indicating it enters pairing mode.
- ③ Press the call button on the video doorbell to request pairing within 30 seconds.
- ④ The chime indicator light stops flashing and rings when pairing is successful.




Chime buttons

Configuration Button	Reset/Single press to enter configuration mode
Volume Button	Loop button to adjust volume level
Music Button	Loop button to switch music

non-15-degree mounting bracket

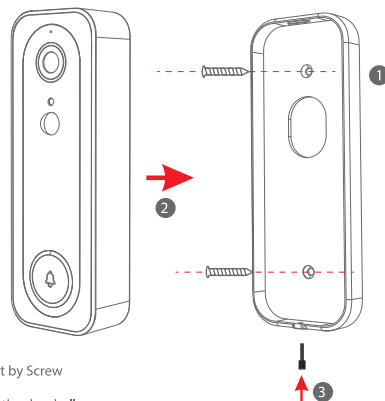

15-degree mounting bracket

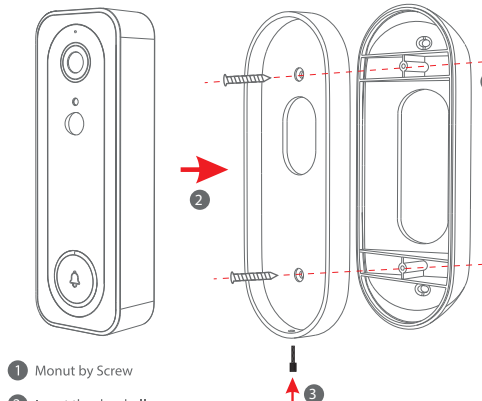

Install APP


Download APP: scan the QR code below to download and install. Register and login: open the "Smart Life" APP to register and login according to the prompts.



Smart Life


Add The Device-Scan QR code mode

- Make sure Wi-Fi is available and connected to the Internet.
- Connect the camera to the power, then system startup completed.
- Open "Smart Life" APP, press the "+" in the upper right corner of the main screen (Figure 01); choose "Security & Video Surveillance", click "Smart Camera" (Figure 02) to add camera; and then click "Next step" (Figure 03);

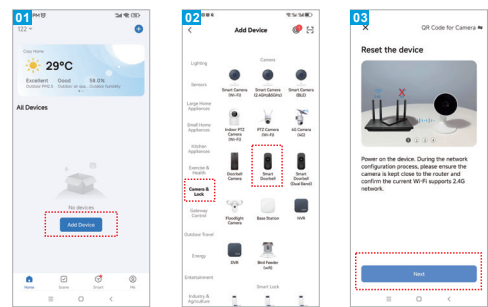

Please note that only 2.4 GHz Wi-Fi network is supported;



- If the mobile phone is not connected to wi-fi, please click "Connect to Wi-fi" (Figure 04);
- It will jump to the WLAN interface and connects Wi-Fi (Figure 05).
- If the phone is connected to Wi-Fi (Figure 06);

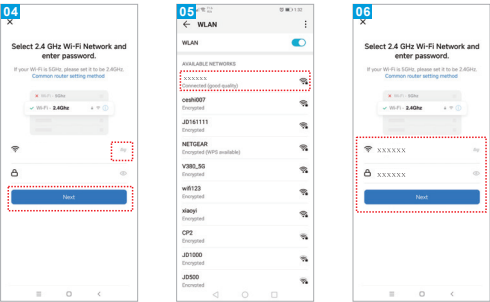

- A QR code will prompt on your screen and you need to scan it with the Smart Camera. (the camera is about 20-30 cm away from the mobile phone lens). Then click "hear the prompt sound" (Figure. 07.)
- "connecting" (Figure. 08);



- connection completed(Figure 09), and click "Done";
- Then jump to preview interface (Figure 10)
- After closing the device preview interface, the interface returns to the APP home page. At this time, the connected device will appear on the APP home page (Figure 11). Then you can click directly to the device interface to see the monitoring situation without re-adding afterwards.

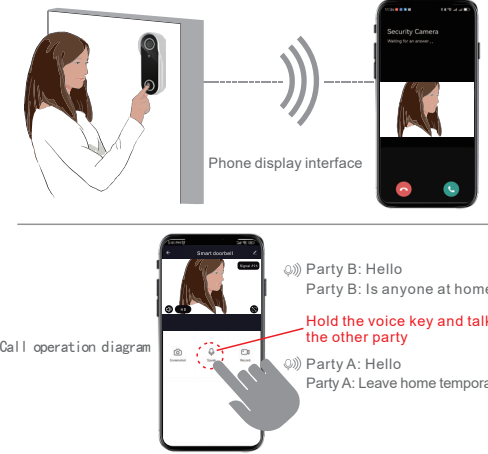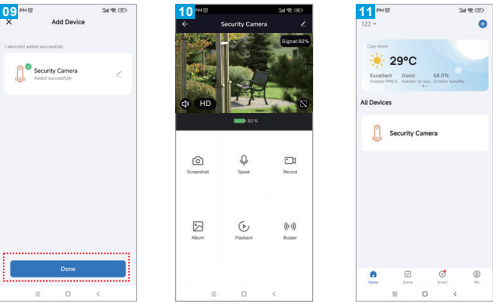

Attention

Try to keep away from the metal space ;
Avoid the furniture , microwave oven blocked;
Avoid the space where the audio, video and data lines are wound, and keep the space away from them as large as possible;
Ensure that as close as possible to the coverage of wireless Wi-Fi signals. Switching network environment:
In the new network environment, please press the reset button about 5 seconds, then connect to the network.

PIR Motion Detection Settings

Enter the application -"Parameter Setting"."Motion Detection" interface.

Sensitivity	Detecting Distance(For moving objects)
Level 1-3 (Low)	Up to 0-3 meters
Level 4-7 (Med)	Up to 3-6 meters
Level 8-10 (High)	Up to 6-9 meters

Warm Tips:

1.When you encounter the missed or delayed alarm frequently in using this camera, you can adjust the motion detection sensitivity to solve them.