


CABLE UTP CAT 6 (80% COBRE) 305M - INTERIOR

C720

Construction	
Jacket	PVC -BLUE
Conductor	CCA (Copper Clad Aluminum)
Cond.size	4*2*0.57mm
Insulator	HDPE
Divider	Plastic Cross
Pair construction	Unshielded Twisted
Cable dimensions (AWG - mm)	
Length	305M(±5M)
Weight	8.5KG
Diameter over jacket	6.2mm
Jacket Thickness	0.65mm
Electric Specifications	
DC Resistance	≤22Ω/100M
DC Resistance Unbalance	MAX 2.5%
Mutual Capacitance	MAX 5.6NF /100M
Capacitance Unbalance	MAX 330NF/100M
Characteristic Impedance	100±15Ω
Voltage rating (Vrms)	30V
Dielectric Strength	5000mΩ/km
Velocity of Propagation	0.62C
Propagation Delay	536ns
Propagation Delay Skew	45ns
Ambiental Specifications	
Installation Temperature	-20°C -50°C
Operating Temperature	-20°C -50°C
Mechanical Specifications	
Bending Radius (min)	≥ 8xOD(without load)
Pulling Tension (max)	≥12.5MP
General Specifications	
Pair Construction	
Pair Color Codes	Blue
	Orange
	Green
	Brown
Compliance (International Standards)	
	EIA/TIA 568 & ISO/IEC 11801
Printing	
	Customerized
Test and results	
Inflamability test	CM
Transmission Parameters	

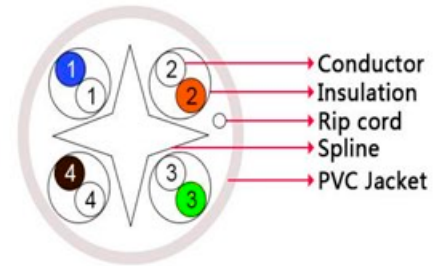

DESCRIPCIÓN

- cable utp categoria 6 ccae (80% cobre)
4 pares *2*0.57mm - 23awg
75 degree - 305 metros
color azul - bajo norma ul



CAT 6 - 80% COBRE - 23 AWG