



CERRADURA INTELIGENTE CON VIDEO PORTERO

MODELO: B023


Operating Manual

- Thank you for purchasing this product.
- Please read this manual carefully before use.
- Please keep this manual for future reference.
- This instruction manual is subject to change without notice.
- The company does not assume the accident and harm caused by user's wrong operation.

Note:

- When leaving the factory, all users are blank and can be verified by the administrator or unlocked with "123456".
- After waking up the interface, enter "*" #" to enter the administrator menu.
- First administrator, please use password as administrator information.
- The '*' key indicates return, and the '#' key indicates confirmation.
- Kind reminder: Please store your mechanical key outdoors for backup!

Function Menu

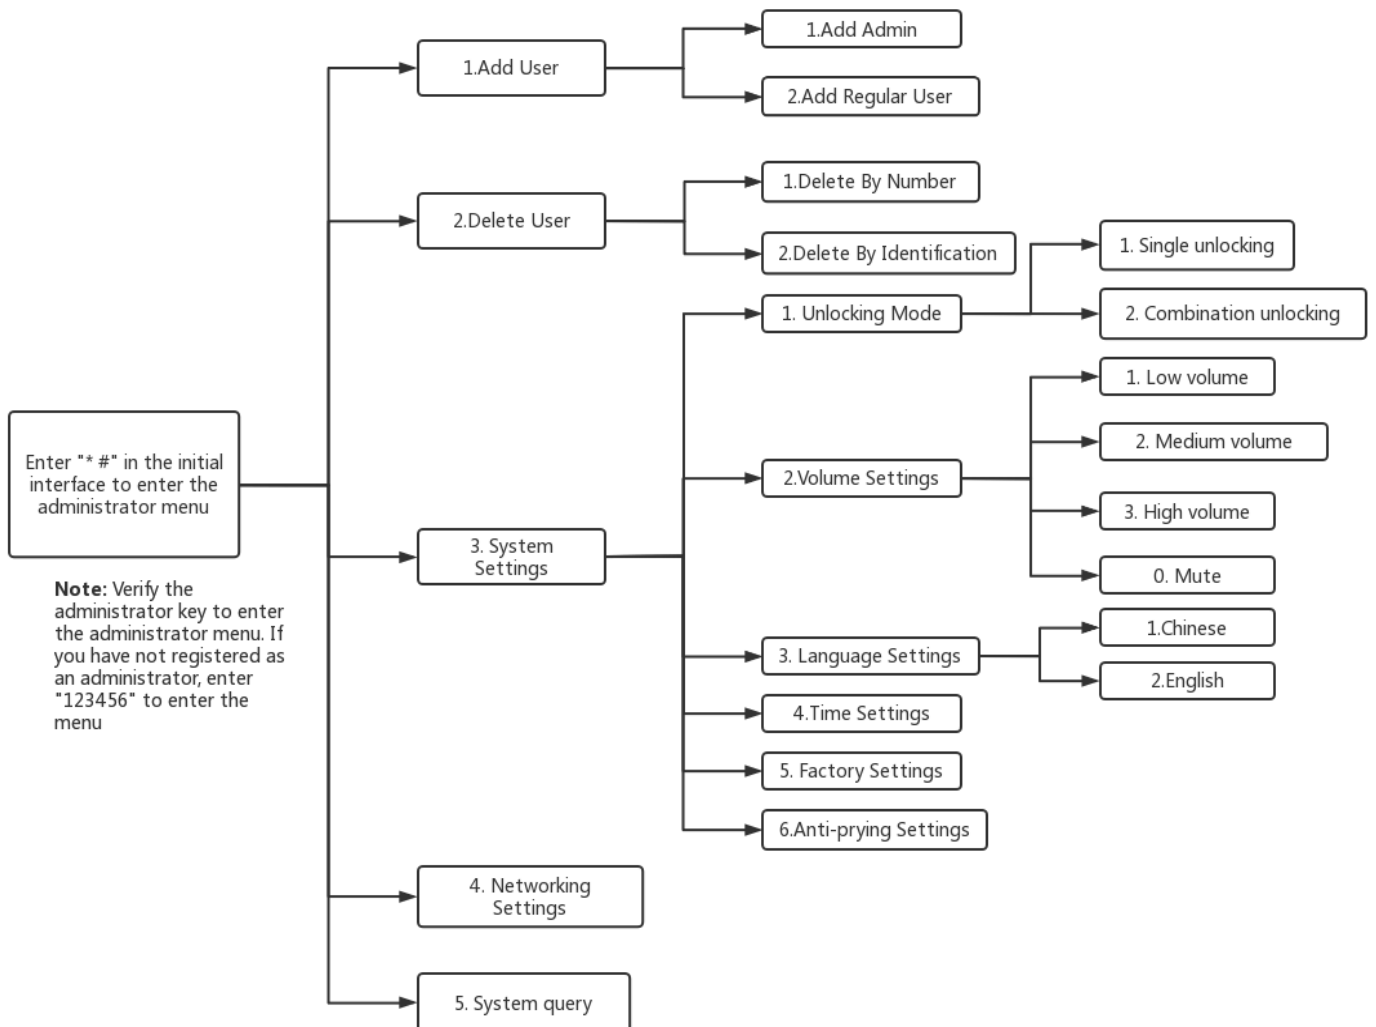

User Management

A. Add administrator




1. Administrator ID : 001-010;
2. The system will automatically register in sequence;

B. Add regular users



1. Ordinary user ID : 011-512;
2. The system will automatically register in sequence;


C. Delete user

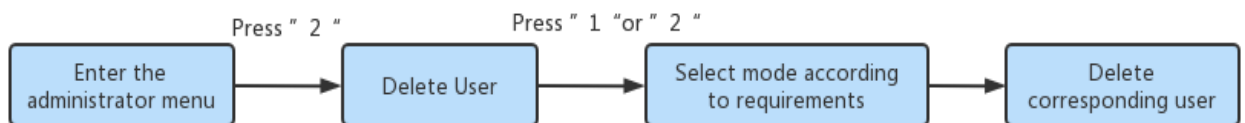

1. There are two ways to delete users: number deletion and identification deletion;
2. Number deletion: Enter the corresponding number of the user to be deleted, such as 013;
3. Identify deletion: Enter the starting information of the user to be deleted, such as the password of administrator 002, 147258. After selecting the recognition deletion mode, enter 147258 to delete administrator number 002;
4. Both administrator and ordinary user information can be deleted. For the normal operation of the system, the administrator verified in this verification cannot be deleted;
5. After deleting a user, the vacancy will be automatically filled at the next registration;

System Settings

D. Unlock mode setting



1. There are two unlocking modes available: single unlocking and combined unlocking;
2. Single unlocking: Simply verify a set of unlocking methods (password, fingerprint, or any set of cards) to complete the unlocking operation;
3. Combination unlocking: Two sets of passwords (password, fingerprint, or any two sets in the card) need to be verified in order to complete the unlocking operation.

E. Volume setting




1. This system has four modes : high volume, medium volume, low volume, and mute. Please choose the corresponding volume level according to your personal needs.
2. Low volume : After entering this mode, press "1";
3. Medium volume : After entering this mode, press "2";
4. High volume : After entering this mode, press "3";
5. Mute : After entering this mode, press "0". After selecting mute, except for entering the administrator menu, the system will not perform voice broadcasting in other situations.

F. Language setting




1. This system has two modes: Chinese and English. Please choose the language mode according to your personal needs.

G. Time setting



1. This setting is used to set the system time, providing accurate time for unlocking records and temporary keys.

H. Anti prying setting

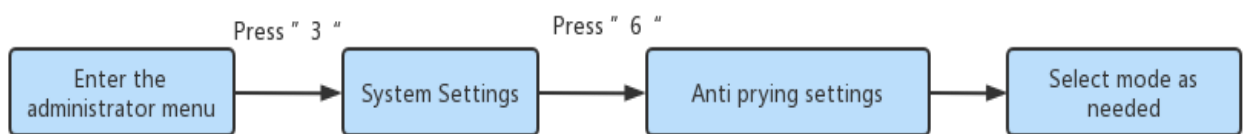


1. This mode can be set to enable or disable the anti prying mode. Please choose according to personal needs.

I. Restore factory settings



1. After restoring the factory settings, the registered administrators and ordinary users in the system will be cleared;
2. To verify the administrator or unlock again, please enter the initial password "123456" to pass the verification;

J. System query

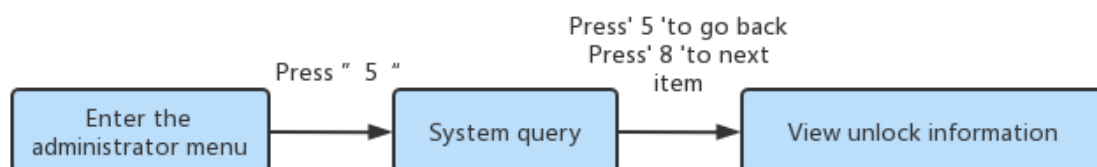

1. Before viewing the unlocking information, please set the system time based on the actual time;
2. After entering this setting, the system will automatically broadcast the unlocking record and press the "*" key to exit.

Networking function

A. Temporary key function



1. When distributing temporary keys, please enter the time setting in advance and set the time to the actual time to ensure the timeliness of the keys;
2. The name can be customized, and the password is the password of the first administrator;

B. Networking settings




1. This function is an optional feature used to configure the network connection of Cat's Eye;

Tuya APP operation instructions

(Matching)

I . Download and install

The iOS version software can be downloaded from the app store, and the Android version can be downloaded from google play, app treasure, Baidu, Ali, 360, Huawei, Xiaomi and other application markets.

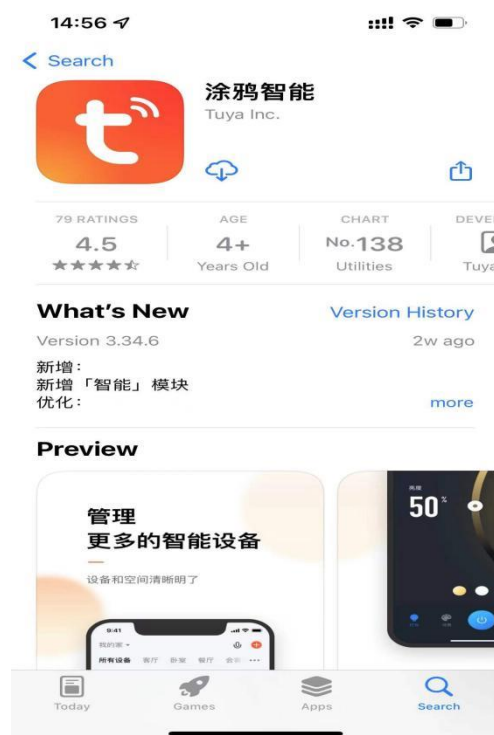

II. Open Tuya Smart APP




Tuya Smart APP

III. Operation of Tuya Smart APP



1、 Register an account

Enter the Tuya Smart APP, click "Register" in the upper right corner, enter the account registration interface, support mobile phone and email account registration, choose any method.

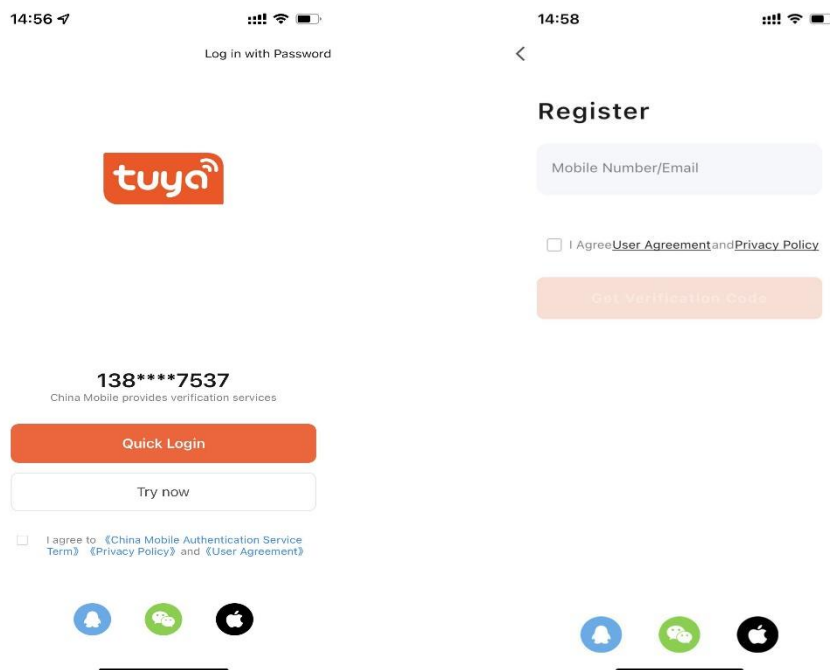

2、 Login account


Log in——enter account——Enter the corresponding password——login successful

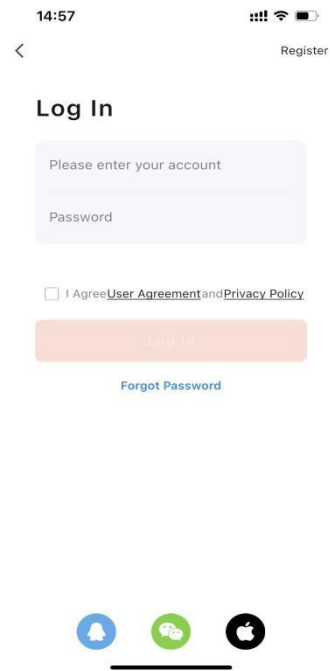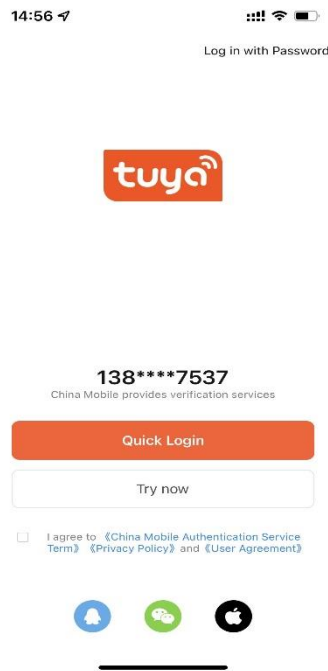

3、Add device

Step 1: Wake up and operate the smart lock, press 1# >> Start Network >> Network Configuration (Lanheng).


Step 2: Add Device - Security Monitoring - "Door Lock - WI-FI"

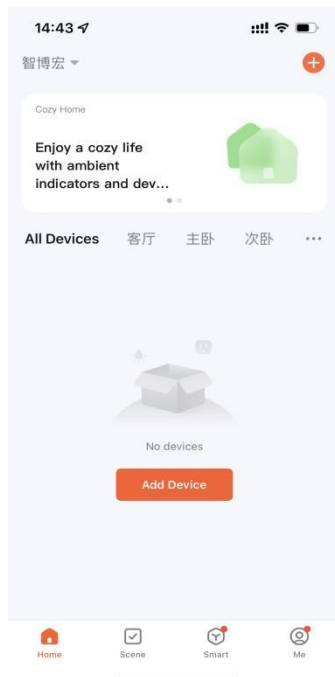

Add device




Security Monitoring

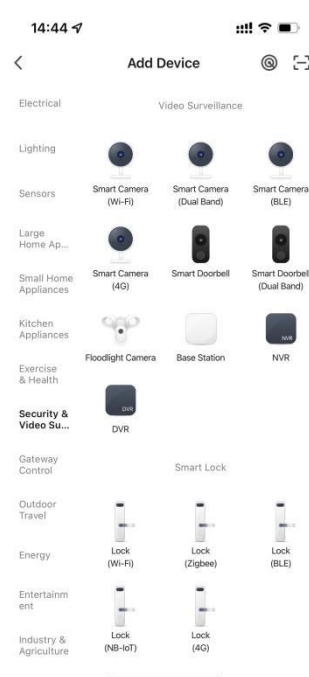


lock (WI-FI)


4、Connect to WIFI, enter the password of the connected WIFI, click Next.

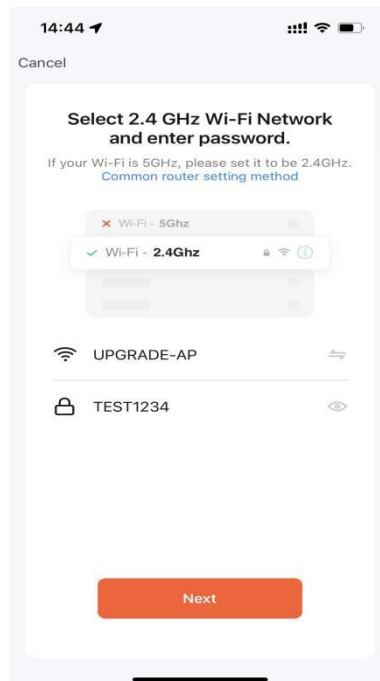


5、Follow the steps, the next step.

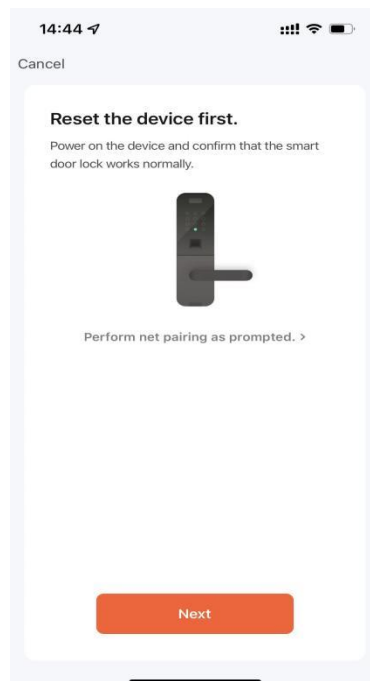

6、Select Wi-Fi fast connection

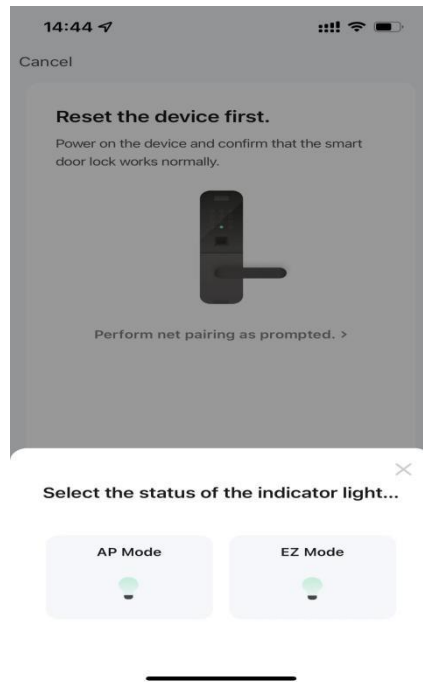

7、Wait for the distribution network

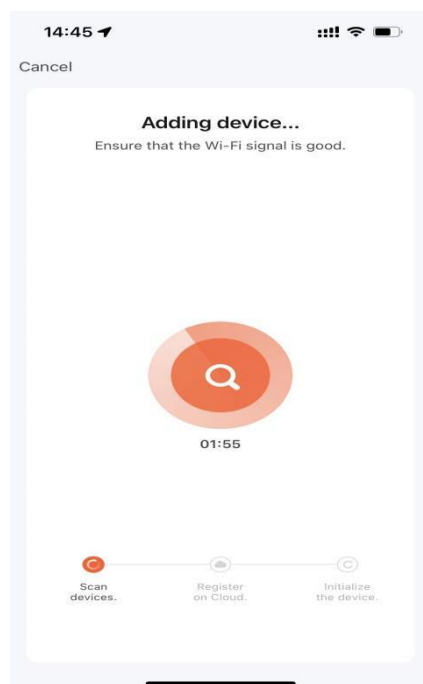

8、The distribution network is successful, enter the home door lock PRO

