


dimax

Modelo: H343

Notes Before Installation

1. Wi-Fi Only support a 2.4GHz network (802.11 b/g/n)
2. Neutral wire Required.
3. Basic electrical wiring knowledge or experience required , or please consult a professional electrician
4. ON/OFF Button also can be used as reset button, long press to reset your dimmer switch to factory defaults. Only do this if you are sure you want to erase all your settings

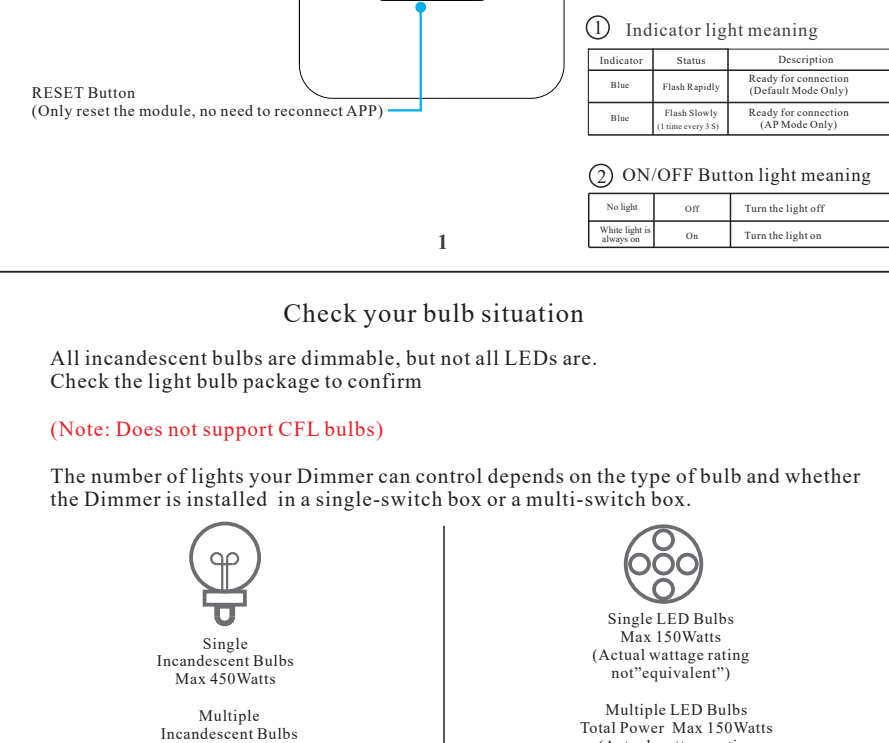

Check your bulb situation

All incandescent bulbs are dimmable, but not all LEDs are.
Check the light bulb package to confirm

(Note: Does not support CFL bulbs)

The number of lights your Dimmer can control depends on the type of bulb and whether the Dimmer is installed in a single-switch box or a multi-switch box.



Single Incandescent Bulbs
Max 450Watts

Multiple Incandescent Bulbs
Total Power Max 500Watts



Single LED Bulbs
Max 150Watts
(Actual wattage rating not "equivalent")

Multiple LED Bulbs
Total Power Max 150Watts
(Actual wattage rating not "equivalent")


WARNING! RISK OF ELECTRIC SHOCK.
Incorrect installation could be dangerous or illegal. Multiple breakers may need to be de-energized for safe installation. Please call a professional electrician if you are unfamiliar or uncomfortable with electrical work.

Installation Guide

Step.1

Turn off circuit breaker


Find your light's control in your circuit breaker and turn it off. Then make sure the power is off by flipping your switch a few times.

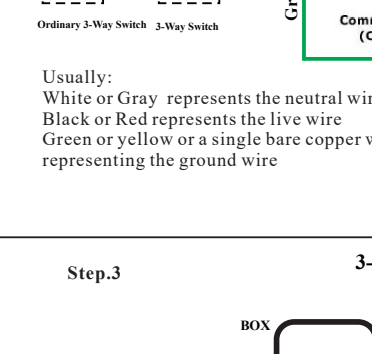

Step.2

Find the neutral wire


In the wall cassette, look for one or more white wires secured with a wire nut. Do you have a neutral wire?

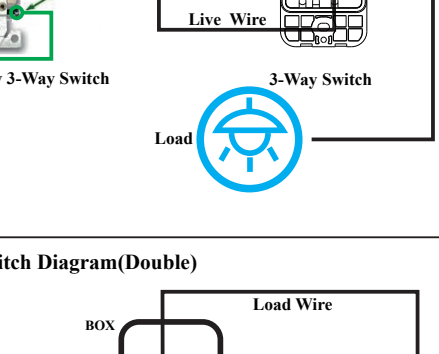

⚠ If you can't find neutral wire
Please change another wall cassette, to find a neutral wire, if you really can't find out a neutral wire in your wall cassette, please contact professional electrician to help you.

Step.3


3-Way Switch Diagram(Single)

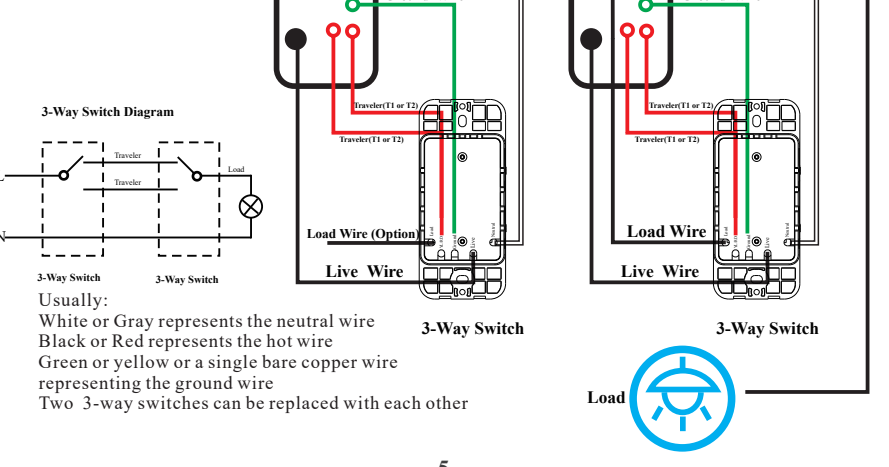

Usually:
White or Gray represents the neutral wire
Black or Red represents the live wire
Green or yellow or a single bare copper wire representing the ground wire


Step.3

3-Way Switch Diagram(Double)

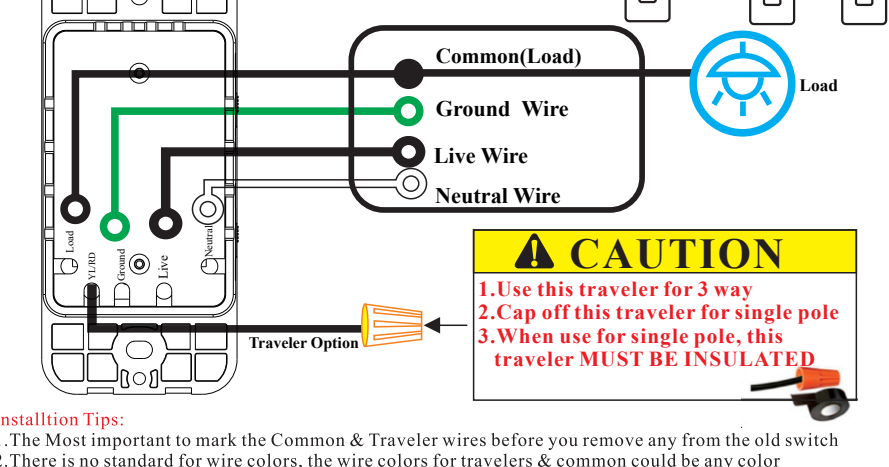

Usually:
White or Gray represents the neutral wire
Black or Red represents the hot wire
Green or yellow or a single bare copper wire representing the ground wire
Two 3-way switches can be replaced with each other

Switch Can Replace 3 Way or Single Pole Switch

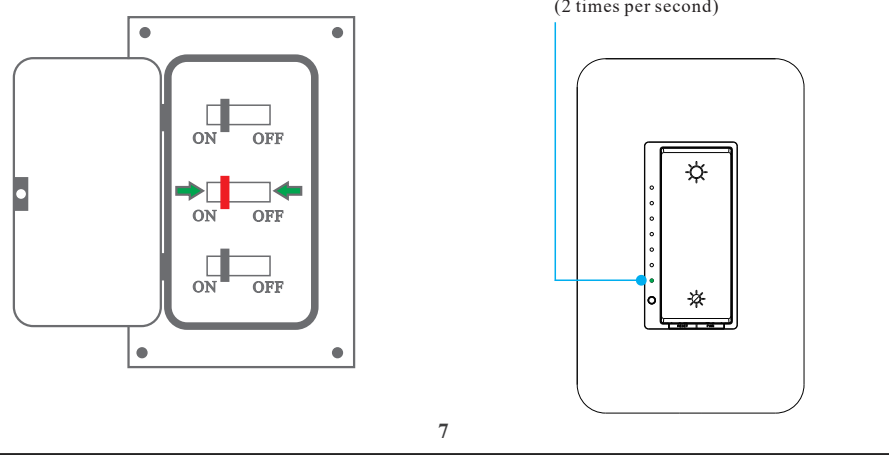


CAUTION
1. Use this traveler for 3 way
2. Cap off this traveler for single pole
3. When use for single pole, this traveler MUST BE INSULATED

Installation Tips:
1. The Most important to mark the Common & Traveler wires before you remove any from the old switch
2. There is no standard for wire colors, the wire colors for travelers & common could be any color

STPE.5

Turn on circuit breaker


Turn on your switch's power from the circuit breaker. Press the switch a few times to make sure it works.

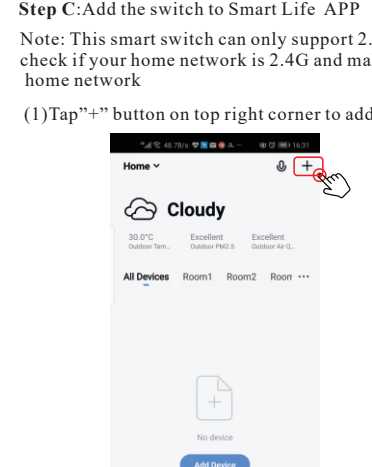

STPE.6


Check the indicator status

Tap NEXT when the indicator blinks

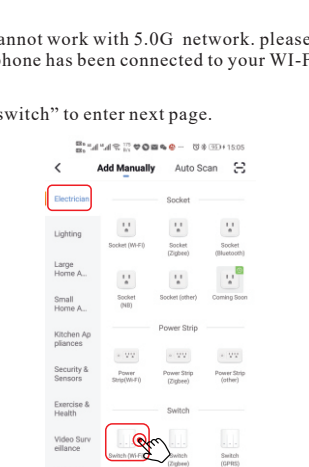

Install the "Smart Life" APP

Step A: Find out "Smart Life" app in Apple app store, Google Play, or scan the QR code below and install it.

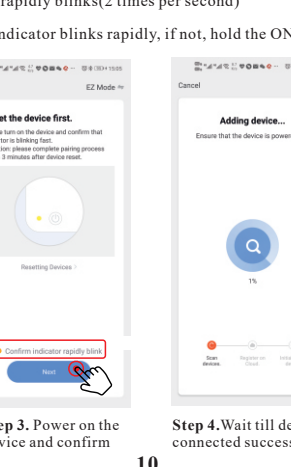


The free app "Smart Life" is compatible with mobile devices the support IOS8.0 above, Android 4.4 above

Step B: Enter the register interface, input the email address/phone number for getting the verification code to register an account. Please just login if you already have a Smart Life account.

Step C: Add the switch to Smart Life APP

Note: This smart switch can only support 2.4G network and cannot work with 5.0G network. please check if your home network is 2.4G and make sure that your phone has been connected to your Wi-Fi home network


(1) Tap "+" button on top right corner to add device, the tap "switch" to enter next page.

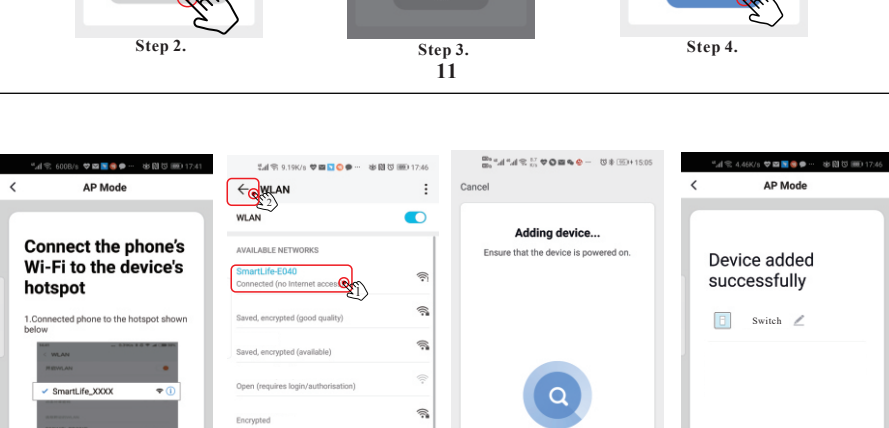

Default Mode(Recommend)

Indicator light rapidly blinks (2 times per second)

Step 1: Make sure the indicator blinks rapidly, if not, hold the ON/OFF button for 7-10 seconds for reset.

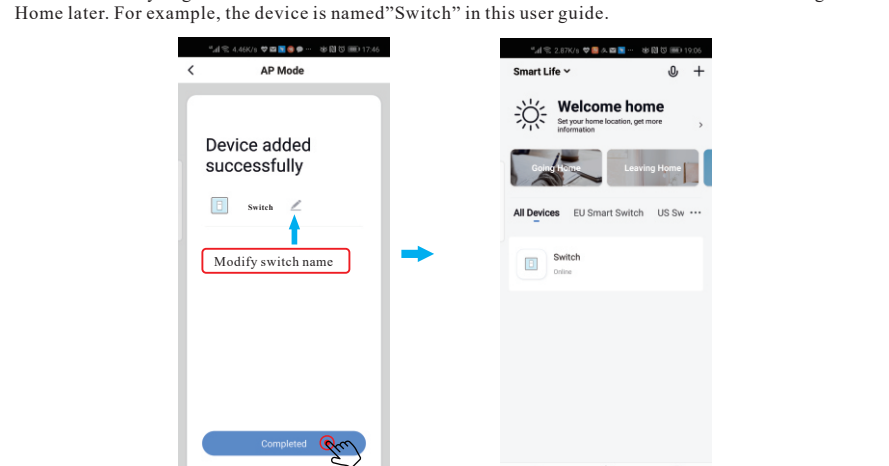

AP Mode(Alternative)

Indicator light slowly blinks (1 time every 3 second)

Step 1: When the indicator blinks rapidly, press and hold the ON/OFF button for another 7-10 seconds. If the indicator will blink slowly.

