

GABINETE 4U SOHO - 19" 450 MM - 246 MM

C749

> CARACTERÍSTICAS

- Gabinete 4U soho - 19"
- 450 mm profundidad - 246 mm altura
- Montable en pared
- Puerta frontal con cerradura
- 2 laterales desmontables
- Protección IP 20

S/N	Specification	Qty	Material	Surface Finish	Remark
1	Front door	1	5MM toughed glass door/ SPCC t1.2	Powder coated	----
2	Side panel	2	SPCC t1.0	Powder coated	----
3	Frame	1	SPCC t1.2	Powder coated	----
4	Mounting profile	1	SPCC t1.2	Powder coated	----
5	Back panel	1	SPCC t1.0	Powder coated	----
6	19" rails	4	SPCC t1.2/1.5	Powder coated	<15U Thickness: 1.2mm >=15U Thickness:1.5mm
A	M6 screw&nuts	10	Steel	Color zinc	20pcs for over 12U
B	Trox tooling	1	Steel	Black	----



Standard

- Comply with ANSI/EIARS-310-D, IEC60297-2, DIN41494;PART1; DIN41494; PART7

Material

- SPCC Cold Rolled Steel;
- Thickness: 19" rails: 1.2/1.5mm, side panel 1.0mm, others: 1.2mm


Colour

- SA 000000:RAL7035
- SA 000010:RAL9004

Loading Capacity

- Static loading: 60KG

RU	Width(mm)	Depth(D)(mm)	Height(H)(mm)
4	600	450	246
		600	
6	600	450	370
		600	
9	600	450	500
		600	
12	600	450	635
		600	

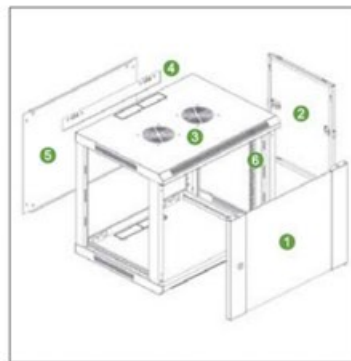

Feature

- Welded frame, reliable structure;
- Standing or wall mounting installation;
- Adjustable feet and heavy duty castors are optional;
- Easy mounting installation (patent) ;
- 19" standard installation;
- Removable side panels, side locks optional
- Cable entry on both of top cover and bottom panel;
- 120mm fan available;
- Turning angle of front door is over 180 degrees