
SM SX PATCH CORD 3MM 3M SC APC - SC UPC

Y017

DESCRIPCIÓN

- Monomodo 9/125 µm
- SC/APC - SC/UPC Simplex
- Alta calidad de transmisión gracias a conectores de gama premium con férula de circonio y tecnología de contacto físico (PC) o contacto físico ultra (UPC).
- Cables libres de halógenos (LSZH): ignífugos, no emiten gases corrosivos ni tóxicos y generan poco humo en caso de incendio, para una mayor seguridad.
- Ventaja adicional: transferencia de datos Gigabit Ethernet de hasta 10 Gbps.

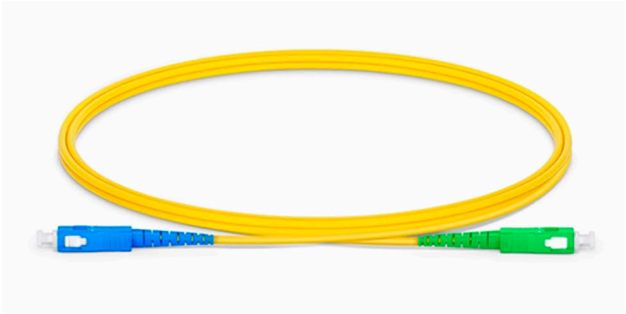

ESPECIFICACIONES

Insertion Loss	≤0.30	Repeatability	≤0.2dB
Returnback Loss	≥60dB	Interchangeablility	≤0.2dB

DETALLES IMPORTANTES

- Los latiguillos de fibra óptica son adecuados para aplicaciones de comunicación de datos de baja pérdida, centros de datos y algunas aplicaciones críticas. Cumplen con los requisitos de rendimiento de las normas IEC, ANSI-TIA y Telcordia, así como con las normativas RoHS, REACH y SvHC.

CARACTERÍSTICAS

Model	Y017
Product name	SM SX PATCH CORD 3MM 3M SC APC - SC UPC G657A1
Fibre type	Single mode/G657A1
Outer diameter sheath single fibre	3 mm
Cable type	Simplex
Type of connector connection 1	SC Simplex
Type of connector connection 2	SC Simplex
APC/UPC version connection 1	APC
APC/UPC version connection 2	UPC
Colour outer sheath	Yellow
Sheath Material	LSZH (Low Smoke Zero Halogen)
Core type	A-level zirconia ceramic core
Operating / setting temperature	-20-70 °C
Storage temperature	-40-75 °C
Length	3m