

dimaxx

Modelo: H369

#### Package Includes

1x Wi-Fi Switch Module  
1x User Manual


#### Specifications

| Type               | Wi-Fi Switch Module |
|--------------------|---------------------|
| Model              |                     |
| Power supply mode  | Neutral+Live Wire   |
| Rated Voltage      | AC100-240V~50/60Hz  |
| Max Load           | LED 2X150W 2X10A    |
| Wireless Frequency | 2.4GHz              |
| Wireless Standard  | IEEE802.11 b/g/n    |
| Size               | 40.3*43*22.5mm      |


#### Indicator light meaning

| Indicator  | Status                                | Description                                 |
|------------|---------------------------------------|---------------------------------------------|
| Blue light | Flash Rapidly<br>(2 times per second) | Ready for connection<br>(Default Mode Only) |
| Blue light | Flash Slowly<br>(1 time every 3.5)    | Ready for connection<br>(AP Mode Only)      |


#### Product Diagram



Wiring position



#### Wiring Diagram

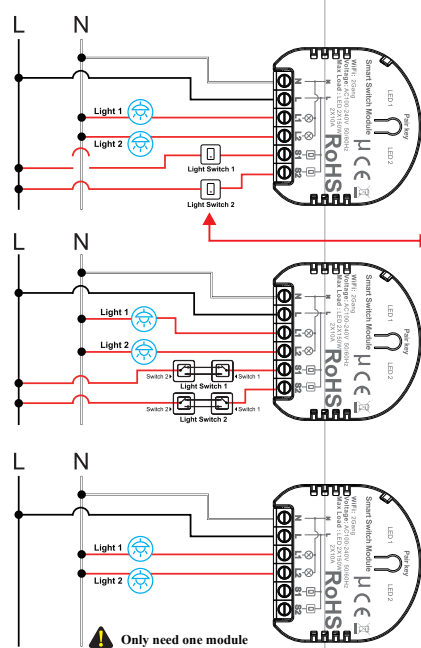

Compatible with 1 to 3-Way control lines

#### 2 gang 1 Way Control

**Note:** When the controller has been installed, but power-on distribution network is failure, at this time, you can restore the factory settings through quick on/off S1 or S2 button 10 times total within 5 seconds

#### 2 gang 2 Way Control

#### 2 gang Without Switch

**CAUTION**  
Please cut off the power before installation

#### Install the "Smart Life" APP

##### Download the "Smart life"

1.Download and launch the "Smart life" App form the App Store or Google Play, or scan the QR code below.  
(The free app "Smart Life" is compatible with mobile devices the support IOS8.0 above, Android 4.4 above)



Smart life

GET IT ON  
Google Play

Download on the  
App Store

2. Create a new account.  
3. Connect you mobile device to a 2.4GHz Wi-Fi network.  
*Note: This product only support 2.4G networks.*

#### Setup Guide

##### Easy Setup

- (a) In the app, select the 【+】 icon. (Figure 1)  
(b) Select the device type 【Electrician】, and then tap 【Switch(WI-FI)】 (Figure 2)

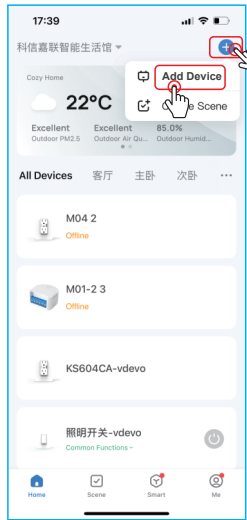


Figure 1



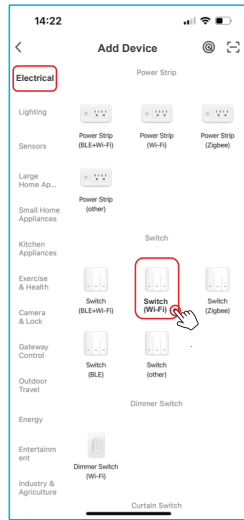


Figure 2

#### Blink Quickly(Recommend)



Step 1.Enter pairing mode: long press the button until the indicator light Blink quickly

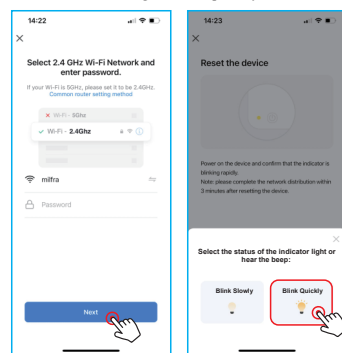


Step 2.Enter Wi-Fi password to join your network

Step 3. Power on the device and confirm the indicator is slowly blink


Select "Blink Quickly"

Step 4.Follow the prompts to complete the next step.

#### Blink Slowly (Alternative)



Step 1.Enter pairing mode: long press the button until the indicator light Blink Slowly

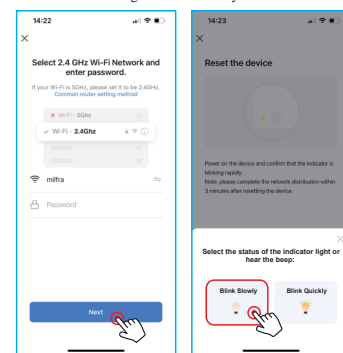

Step 2.Enter Wi-Fi password to join your network


Step 3. Power on the device and confirm the indicator is slowly blink

Select "Blink Slowly"

Step 4.Follow the prompts to complete the next step.

#### APP operation interface

Enter more settings

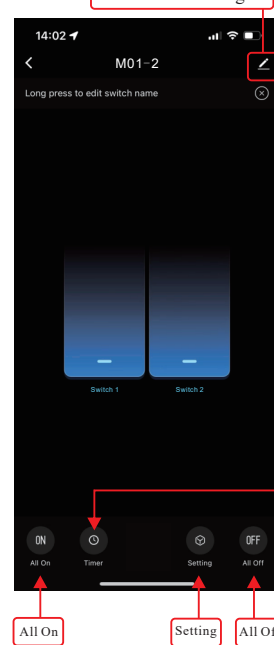


Setting Timer

All On

Setting

All Off

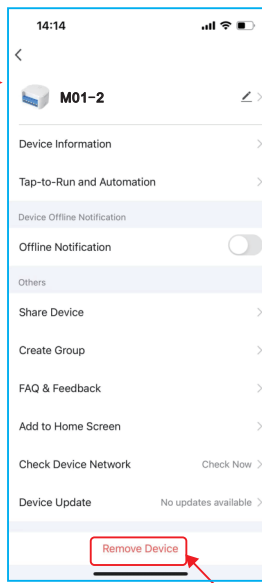

You can remove device

